



SCANFLEX® II BLADE 8 RMx1/2

Multifunctional JTAG/Boundary Scan Controller



- 1 or 2 SFX II BLADE 8 in a 19" 1HE rack
- each single controller is independent, with separate USB/LAN and power port
- high-performance controller for embedded test and programming
- outstanding flexibility through multifunctional I/O channels and FPGA instrumentation for mixed-signal and high-speed test
- high modularity and scalability through configurable TAP interface cards and additional I/O modules
- integrated compact unit controllable via USB 3.0 and GBit LAN

Technical specifications SCANFLEX® II BLADE 8 RMx1/2 - Boundary Scan Controller


Parameters (for one slot)	
number of TAP slots	8 (independent and individually configurable with TAP plug-in card)
maximum TCK frequency	100 MHz (adjustable via software)
parallel I/O channels	64 mixed-signal channels combined with FPGA, individually configurable as Input, Output, Tri-State, via software programmable V _{I/O} 0.9-3.6 V (8 groups with 8 I/O)
maximum number of I/O modules	30 modules via external SFX carrier
integrated technologies	SPACE™, HYSCAN™, ADYCS™, ChipVORX®, FastScale™

Embedded test

- support of latest technologies such as Processor Emulation Test, FPGA Assisted Test and Embedded Diagnostics Test
- synchronization with multifunctional I/O channels and ChipVORX® FPGA instruments

High performance

- use of powerful multi-core processors and FPGAs
- simultaneous operation at up to 100 MHz on all TAPs
- operation at up to 100 MHz on I/O channels
- support for gang operations

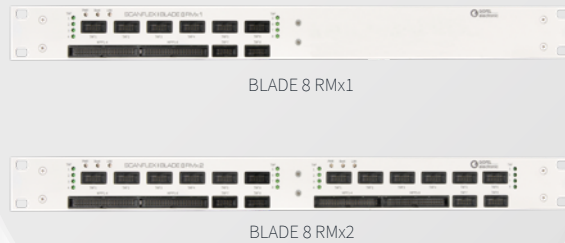

Software

- integrated into Embedded JTAG Solutions platform SYSTEM CASCON™
- Plug and Play integration in 3rd party systems
- open mix of test and programming procedures in one software environment

Embedded programming

- high-speed programming of Flash components like NAND, NOR, SPI, I²C, eMMC etc. (also via I/O)
- universal programming of microcontrollers
- FPGA/PLD programming

SCANFLEX® II BLADE 8 RMx1/2

Flexible controller for embedded test and programming

Expandability per slot

- support of up to 30 parallel controlled SCANFLEX® I/O modules
- scalable number of one to eight TAPs
- interfaces for additional debug and control components

Adaptability

- transmission over long distances of up to two meters to the target without TCK reduction or transmission problems
- software-parameterized I/O (slew rate, impedance, termination)
- via software selectable protocols (JTAG, DAP, COP, SWD, BDM, SBW, UART etc.)

🇩🇪 Made in Germany



ISO 9001 certified

🇩🇪 GÖPEL electronic GmbH

Goeschwitzer Str. 58/60
07745 Jena · Germany

+49 3641 · 6896 0 Phone
+49 3641 · 6896 944 Fax

✉ ejs.sales@goepel.com
🌐 www.goepel.com

🇬🇧 ejs.sales@goepel.co.uk

🇺🇸 ejs.sales@goepelusa.com

🇮🇳 ejs.sales@goepel.asia

🇩🇪 ejs.sales@goepel.in